





	Model: Select Plus					
	<p>The Select Plus includes an embedded DVR, offers up to 16 channels (audio and video) and is perfect for small retailers, restaurants, auto shops and offices. A value-based solution with more enhanced functionality than the Select Standard model. The Select Plus uses the same H.264 Compression Technology as our Professional and Enterprise Series models, allowing more recording time while using less space.</p>					
	H.264 	Linux RTOS 	ROHS 	Mobile via NVR 	Real-time @ 4CIF 	Smart Controller 

FEATURES

- ❖ Video Hardware Compression H.264
- ❖ Linux RTOS (Real-time Operating System)
- ❖ High Quality (30fps) Display/Record/Playback
- ❖ Up to 16 Channels Video and Audio
- ❖ Configurable OSD and Watermark
- ❖ Remote via Web Client or Global NVR Client
- ❖ Motion, Sensor and Continuous Recording
- ❖ Alarm Input and Output
- ❖ Remote Configuration via Global NVR Client
- ❖ Multi-level User Interface (Up to 16)
- ❖ Dual Video Streaming
- ❖ ROHS Compliant
- ❖ Playback up to 16 Channels
- ❖ Multi-Zone motion detection
- ❖ 1080P HD Output
- ❖ Live Audio Playback from Main Screen
- ❖ Support DDNS
- ❖ One Touch Snap Shot
- ❖ HDD Sequential Technology
- ❖ Auto-Avoiding Damage HDD Technology
- ❖ Video Matrix via TV Output
- ❖ Support Video Masking
- ❖ Backup Recorded Video to MP4 Format

CONTACT

Global Surveillance, Inc.
5825 Callaghan Road, Suite 200, San Antonio, TX 78228
info@gsiamerica.com Fax: 210.272.0375

SPECIFICATIONS

Model	SP-08A	SP-16A	N/A
Chassis	Industrial Set-Top		
Main Processor	Embedded High Performance		
Video Streaming	Dual Streaming		
Display / Record /	30 fps / 30 fps / 30 fps @ 4CIF		
Video / Audio Input	8 / 8	16 / 16	
Video Compression	H.264		
Audio Compression	G.726 / G.711		
Alarm Input / Output	16 / 8		
Frame Rate	240 fps	480 fps	
Video Output	4x TV Out, VGA & DVI Out, S-Video		
Max HDD Support	6		
Communication Ports	1x RS-232, 2x USB, RJ-45 10/100/1000		
Playback View	Up to 16 Channels		
Data Storage HDD	Up to 4TB		
Backup Type	CD/DVD		
Regulatory Type	CE, FCC		
Dimension	2.7" H x 17" W x 14.5" D		
Power Supply	115~230, 4A, 60Hz		
Approximate Weight	20 lb		
Operating Temperature	30°F ~ 110°F		
Working Humidity	10% ~ 90%		
Operating System	Linux RTOS		
Warranty	2 Years		

OPTIONS

- Internal Storage: Up to 4TB

H.264 Hardware Compression



Adopts H.264 hardware digital video compression. Produces high video quality and lower video compression

Linux (RTOS)



Linux (Real-Time Operating System).

ROHS Compliant



All Global products have met the European Union standard "Restriction of Hazardous Substances" ROHS

View Live Video from BlackBerry and iPhone



Live video can be viewed via Windows Mobile 5/6, BlackBerry and iPhone once connected to Global NVR Client

30 fps


Real-time Display, Record and Playback at 4CIF. 30 fps per channel for video.

Smart Controller



The controller writes data direct to current active HDD and auto-sleep others to prolong the HDD life.


Embedded DVR Interface

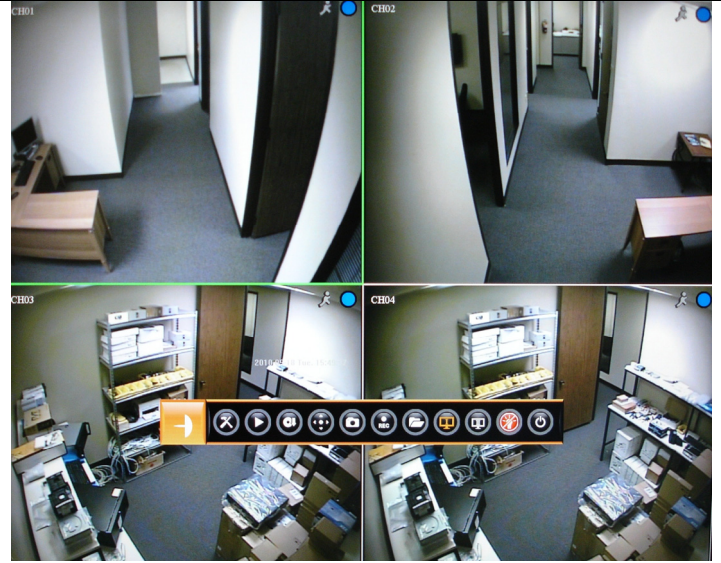

Global NVR Application



Web Client

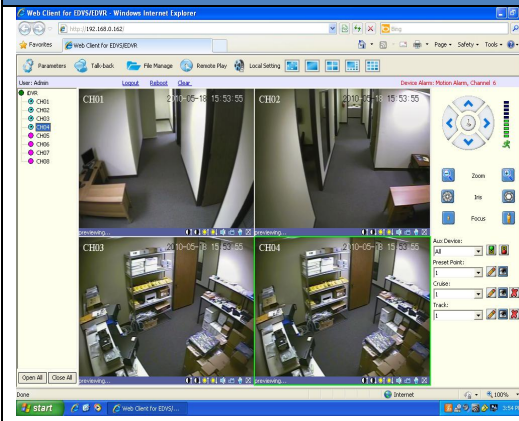

Mobile Client

